

66793 U.S. PTO IN THE UNITED STATES PATENT AND TRADEMARK OFFICE



05/08/98

**UTILITY PATENT
APPLICATION TRANSMITTAL LETTER**

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of Gordon R. MEYER, Albert R. HOWARD, Jr., Kevin KNABE and Richard B. HOIBERG for METHOD FOR DYNAMICALLY GENERATING A "TABLE OF CONTENTS" VIEW OF A HTML-BASED INFORMATION SYSTEM.

Also enclosed are:

- ☒ 13 sheet(s) of ☐ formal ☒ informal drawing(s);
- ☐ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 is ☐ hereby made to filed in on ;
☐ in the declaration;
- ☐ a certified copy of the priority document;
- ☐ a Constructive Petition for Extensions of Time;
- ☐ statement(s) claiming small entity status;
- ☐ an Assignment document;
- ☐ an Information Disclosure Statement; and
- ☒ Other: An unexecuted Declaration

The declaration of the inventor(s) ☐ also is enclosed ☒ will follow.

- ☐ Please amend the specification by inserting before the first line the sentence --This application claims priority under 35 U.S.C. §§119 and/or 365 to filed in on ; the entire content of which is hereby incorporated by reference.--

The filing fee has been calculated as follows [] and in accordance with the enclosed preliminary amendment:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$790.00
Total Claims	56	MINUS 20 =	36	x \$22.00	792.00
Independent Claims	7	MINUS 3 =	4	x \$82.00	328.00
If multiple dependent claims are presented, add \$270.00					
Total Application Fee					\$1,910.00
If verified Statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					
Add Assignment Recording Fee of \$40.00 if Assignment document is enclosed					
TOTAL APPLICATION FEE DUE					\$1,910.00

[X] A check in the amount of \$ 1,910.00 is enclosed for the fee due.

[] Charge \$ _____ to Deposit Account No. 02-4800 for the fee due.

Please address all correspondence concerning the present application to:


James W. Peterson
Burns, Doane, Swecker & Mathis, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404.

The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in triplicate.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: May 8, 1998

By: 
James A. LaBarre
Registration No. 28,632

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

**APPLICATION FOR
UNITED STATES LETTERS PATENT**

For

**METHOD FOR DYNAMICALLY GENERATING A "TABLE OF
CONTENTS" VIEW OF A HTML-BASED INFORMATION SYSTEM**

by

**Gordon R. Meyer
Albert R. Howard Jr.
Kevin J. Knabe
and
Richard B. Hoiberg**

**BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, VA 22313-1404
(703)836-6620**

METHOD FOR DYNAMICALLY GENERATING A "TABLE OF CONTENTS" VIEW OF A HTML-BASED INFORMATION SYSTEM

BACKGROUND

5 The present invention relates generally to on-line help systems and, in particular, to a method for providing an up-to-date table of contents of the help topics that are currently available to a user of the system.

10 It is common practice for programmed data processing systems to provide on-line assistance to an operator or user in response to a request for help, by displaying help information to the operator at a workstation. The assistance may consist of actual help information or of a menu or index of possible help topics from which the operator can select an item of interest.

15 Conventional help systems require an author to create a table of contents that reflects the individual components (akin to "chapters" and "books") that are known to exist on the system. Typically, the table of contents includes links to various files that contain the desired help information to assist the user in navigating to that information. For this purpose, the table of contents might be written in a format such as that provided by the Hypertext Markup Language (HTML), which facilitates such linking. The HTML links (i.e., HREFs) that lead to each chapter or book must be hard-coded to reflect the current location of the help information files. Once the information for the help system is installed on a user's computer, it is vulnerable to broken links because users can move or delete files, or web servers can change locations. This results in at least some portion of the table of contents ceasing to be functional. Additionally, if new information is added to the system by installing new software components, the new information will not appear in the pre-authored table of contents. This results in inaccessible or "orphan" content.

20

25

In the past, therefore, authors had to be careful to maintain existing links and fit their content within specific areas that were designated at the creation of the

help system. Most links and document hierarchies were frozen, with only minimal customization possible and no cross-document linking permitted. This static type of system is not viable for large, comprehensive, and extensible help systems.

Other systems have been developed to provide users with available help
5 information. One example of such a system is Microsoft WinHelp, which provides a table of contents view which is compiled by the author. The system provides the contents of the system that are available at the time of compilation. However, this system fails to provide the user with an up-to-date listing of available system information which is reflective of changes made to the system
10 after the compilation (i.e., the system is not a dynamically-generated system).

Netscape NetHelp also provides a table of contents view. The table of contents view is implemented in JavaScript, using information provided by the author. This system, like the Microsoft WinHelp system, fails to reflect changes to the system occurring after the time of compilation.

15 SUMMARY

The present invention overcomes the above-identified limitations in the art by automatically providing a user with a table of contents that is reflective of the information that is currently available on the system. The table of contents is generated by scanning specific files for pre-defined information, such as HTML
20 meta-tags. The information gathered is merged with pre-defined HTML template files that control the formatting and presentation of the information. The resulting table of contents which is provided to the user accurately reflects the current content of the information system.

Dynamically generating a table of contents for an information system
25 allows authors to add, remove, and change individual components of the system while ensuring that users are presented with a complete and up-to-date list of the information available for use.

The present invention offers the advantages of creating a table of contents on demand, based on the current contents of the information system being accessed. Authors are not required to know the sum-total of the information system. No compilation of the files that make up the system is necessary. All
5 files are text-based, and in a standard format, such as HTML. The format of the table of contents is determined by pre-authored template files. This allows each module to have its own style of presentation.

The present invention is also scalable. Exemplary embodiments generate a two-level table of contents. One level provides a list of all available "books" on
10 the system while the second level provides a list of the "chapters" in each book. Other implementations of the present invention contemplate providing the user with third, fourth, or deeper levels of content. The present invention also allows for the content that is stored outside of the local information system, such as on the Internet, to be included in the table of contents through the use of additional meta-
15 tags.

BRIEF DESCRIPTION OF THE DRAWINGS

The above objects and features of the present invention will be more apparent from the following description of the preferred embodiments with reference to the accompanying drawings, wherein:

20 Figure 1 illustrates an exemplary computer system in which the help system of the present invention may be implemented;

Figure 2 illustrates the hierarchical layout of the help system of the present invention;

25 Figure 3 illustrates a flow chart which provides a brief overview of the operation of the help system of the present invention;

Figure 4 illustrates an exemplary Help menu;

Figure 5 illustrates a conventional Help button;

Figure 6 illustrates a help viewer according to the present invention;

Figure 7 illustrates a help center home page according to the present invention;

5 Figure 8 illustrates a splash page for a help book according to the present invention;

Figure 9 illustrates a splash page for a chapter according to the present invention;

Figure 10 illustrates the placement of index files in the books and chapters of a folder according to the present invention;

10 Figure 11 illustrates the content of the help folder according to the present invention;

Figure 12 illustrates the content of the help viewer folder according to the present invention;

15 Figure 13 illustrates the content of another help folder according to the present invention; and

Figure 14 illustrates the content of the print chapter according to the present invention.

DETAILED DESCRIPTION

20 To facilitate an understanding of the present invention and the advantages offered thereby, features of the invention are often described and illustrated with reference to the use of the invention in a computer running the Macintosh® operating system (Mac OS) developed by Apple Computer, Inc. It will be appreciated by those having familiarity with the relevant technology, however, that the principles of the present invention are not limited to this particular type of
25 operating environment. Rather, the concepts which underlie the invention are applicable to any type of computer operating environment in which it is desirable to provide a user with computer-aided assistance.

An exemplary computer system, of the type in which the present invention can be employed, is illustrated in block diagram form in Figure 1. The structure of the computer itself does not form part of the present invention. It is briefly described here for subsequent understanding of the manner in which the features of the invention cooperate with the structure of the computer.

Referring to Figure 1, the system includes a computer 100 having a variety of external peripheral devices 108 connected thereto. The computer 100 includes a central processing unit 112, a main memory which is typically implemented in the form of a random access memory 118, a static memory that can comprise a read only memory 120, and a permanent storage device, such as a magnetic or optical disk 122. The CPU 112 communicates with each of these forms of memory through an internal bus 114. The peripheral devices 108 include a data entry device such as a keyboard 124, and a pointing or cursor control device 102 such as a mouse, trackball or the like. A display device 104, such as a CRT monitor or an LCD screen, provides a visual display of the information that is being processed within the computer, for example the contents of a document. A hard copy of this information can be provided through a printer 106, or similar device. Each of these external peripheral devices communicates with the CPU 112 by means of one or more input/output ports 110 on the computer. Input/output ports 110 also allow computer 100 to interact with a local area network server or an external network, such as the Internet.

Computer 100 typically includes an operating system which controls the allocation and usage of the hardware resources such as memory, central processing unit time, disk space, and peripheral devices. In addition to an operating system, computer 100 also generally includes some type of help system which provides the user with computer-aided assistance. Although described separately herein, the help system could reside as a component of the operating system or could be stored on any type of machine-readable medium, such as disk 122.

5 The layout of the help system, according to an exemplary embodiment of the present invention, is set forth in Figure 2. As is evident from Figure 2, the layout of the help system is hierarchical and includes a number of folders, sub-folders and files. The operating system help folder 210 is the centralized folder in which the help information for the computer system is stored.

10 In the illustrated embodiment of the present invention, folders 212 which are one level deep within the operating system help folder are referred to as "books." While the operating system help folder in Figure 2 comprises only two books 212, one skilled in the art will recognize that the help folder could comprise any number of books. The individual books 212 of the present invention include files and may also include sub-folders 214. The sub-folders 214, which are those folders two levels deep within the operating system help folder, are referred to hereinafter as "chapters." As recognized by those skilled in the art, the chapters contain files and may contain additional sub-folders.

15 With that brief overview of the layout of the help system of the present invention, the operation of the help system is now described with reference to Figure 3. In step 305, meta-tags are embedded into the files of the help system during a content creation process. These tags provide the information used during table of contents generation. Where possible, industry established meta-tags, such as those used by Internet search engines, are employed. Other meta-tags, as will be discussed in detail below, are also added.

20 In step 310, a user activates the help viewer of the present invention by, for example, selecting help from a help menu. When activated, the help viewer first determines whether a table of contents for the help system already exists (step 25 315). If it does already exist, the help viewer determines in step 320 whether the table of contents is up-to-date. This determination is made by comparing the last modification date of the files in the operating system help folder to the last date in which the table of contents was modified. If the help folder indicates that a file

has been modified since the last time the table of contents was generated, the table of contents has to be regenerated. If the help viewer determines that the table of contents is up-to-date, then it is immediately displayed to the user (step 335).

5 If either of steps 315 or 320 result in a negative response (i.e., that the table of contents does not exist or is not up-to-date), then the help viewer begins the process of generating or regenerating the table of contents. The first step in the generation process is to scan the help folder for files of the type "TEXT" and creator "hbwr" (step 325). The help system of the instant invention facilitates generation of the table of contents by using text files. This eliminates the
10 compilation step associated with table of contents generation of conventional systems. By using text files, the help system can quickly and easily identify potential files to be used for the table generation. In order to further expedite file identification, a creator designation is added to certain files to aid in the filtering process. While the instant invention uses a creator designation of "hbwr," those
15 skilled in the art will recognize that other creator designations may be employed. In addition, or as an alternative, other techniques can be used to designate a creator and otherwise uniquely identify help-related files, such as a particular extension in the known 8.3 file naming conventions.

Each of the files identified as text files with the proper creator designation
20 are opened and examined for the meta-tags needed to generate the table of contents. After all the appropriate files have been scanned, the help viewer, in step 330, reads a pre-authored HTML template file containing text that indicates how the information culled from the meta-tags is to be formatted for presentation.

Finally in step 335, the generated table of contents is displayed to the user.
25 As a result, the user is provided with the most up-to-date listing of help information available on the system.

A user generally gains access to a help system through a Help menu, Help buttons or double-clickable icons. An example of a Help menu is illustrated in Figure 4. The menu includes the following menu items:

- Help Center (410): Choosing this item opens the user's viewer of choice and displays a menu of all "books" in the help system.
- Show/Hide Balloons (420): Turns Balloon help on and off.
- < Application > Help (430): Choosing this item opens the viewer and displays the splash page for the active application's help system. In this particular example, the active application is the computer's operating system.

Other menu items, such as Tutorial, may also be appended to the Help menu by a specific application.

A second method for gaining access to the help system is by clicking a Help button. By clicking a Help button in a control panel or dialog box, the user is given access to specific help content. Figure 5 illustrates a typical Help button.

The third method by which a help system is commonly accessed is by double-clicking a specific icon. Developers can give special emphasis to certain information by placing aliases of help documents on the computer's local hard disk. For example, a new release of an operating system might include a "What's New" document. By double-clicking the "What's New" icon, the user is given access to the desired information.

I. THE HELP VIEWER

Once the user accesses the help system by any one of the preceding methods, a help viewer window is displayed. This window presents a high-level overview of the topics that are available to assist the user in connection with the active application. The help viewer window, as illustrated in Figure 6, includes standard window controls: a title bar, a close box, a zoom box, a collapse box,

vertical and horizontal scroll bars, and a size box. The title of the window displays the title of the current book or the help center heading.

The viewer's button bar includes standard viewer buttons, such as Back 610 and Forward 612. The viewer's button bar also includes a Home button 618 that takes the user to the help center home page. Below the button bar is a field for typing a search query 620 and a search button 622. The insertion point appears in the field 620 when the window is first opened. A status bar appears at the bottom of the window. The help viewer window may also include a menu bar (not shown) to add greater functionality to the help viewer.

10 II. THE HELP CENTER

The help center, as illustrated in Figure 7, provides the user with a dynamically-generated list of those help resources currently available on the computer system. A user can go to the help center in any of the following ways: choosing help center from the Help menu; clicking the Home button in the help viewer window; or double-clicking the help viewer application icon.

If the user clicks a book, the viewer displays the splash page for that book (i.e., the viewer displays the contents of that book). For example, if the user clicks on the operating system help book, the resulting splash page lists those chapters included in the operating system help book. Figure 8 displays a sample splash page for the operating system help book.

A. Tables of Contents for Individual Books

Choosing help from the Help menu for an active application (for example, "Mac OS Help") opens the help viewer and displays a splash page for that particular book (see Figure 8). The left frame of the splash page lists all the "chapters" of the book. The right frame displays a prompt. In Figure 8, the right

frame prompts the user to either type in a search phrase or click on a chapter in the book.

When the user clicks a chapter in the left frame, a list of related documents and/or Web sites appears in the right frame. Referring now to Figure 9, a click from the user on the "Customizing" chapter results in a list of related documents being displayed in the right frame. If the user clicks one of the documents or Web sites listed in the right frame, the viewer goes to that page, replacing the entire contents of the window.

B. Searching

As indicated above, the help viewer provides a user the capability to search for a particular topic of interest. In order for a book or chapter to be searchable, it must have an index file representing its contents. This file is generated through the use of a HTML Indexing Tool. This tool analyzes the text (HTML) files contained in a folder and generates an index file that represents the contents of that folder. The newly created index file is placed inside of the folder whose contents it represents. The file name, according to exemplary embodiments of the present invention, is preferably "< folder name > index".

The HTML Indexing Tool analyzes every file in the folder of type "TEXT" and having the proper creator designation. Every text file can be returned as a search result. There are several HTML meta-tags that can be used to control the indexing of the HTML files by the HTML Indexing Tool. Listed below are exemplary meta-tags that can be used in this context.

```
<META NAME = "Robots"    CONTENT = "INDEX" >
```

The Robots meta-tag can be used to control indexing behavior. Possible values are INDEX, NOINDEX, and SEGMENTS. A value of NOINDEX causes this file to not be indexed at all. A value of

SEGMENTS causes only specified segments to be indexed as possible search results. A value of INDEX causes the entire file to be indexed as a possible search result. The default value is preferably INDEX.

```
<META NAME = "DESCRIPTION" CONTENT = "text string" >
```

```
5 <!-- Abstract = "text string"-->
```

10 The DESCRIPTION meta-tag and the Abstract comment can be used to display an abstract in the search results if this article is returned as a potential match. The meta-tag is used when an abstract applies to an entire file; the comment is used when the abstract applies only to an article within the file.

```
<!-- SegStart = "Locking A Disk" -->
```

15 The SegStart comment can be used to delineate multiple segments, or articles, within a single file. This allows one HTML source file to contain several articles, each of which can be returned as a separate "hit" in a search. For each SegStart there is a matching SegEnd comment. If the segment is associated with a HTML link in the page, the link is located between the SegStart and SegEnd comments. This way, if the user clicks on the link associated with the segment in the search results, they are taken to the correct location within the file.

```
20 <!-- SegEnd -->
```

This indicates the end of a segment.

```
<META NAME="KEYWORDS" CONTENT="memory, virtual,
losing" >
```

25 The KEYWORDS meta-tag can be used to control indexing behavior. Normally, only words that are NOT between the < > markers are

indexed. If there is a need to index words that are not part of the given file, additional keywords may be entered using the KEYWORDS meta-tag, or a Keywords comment. The meta-tag should be used if the keywords apply to the entire file. The Keywords comment should be used between the SegStart and SegEnd comments for keywords that apply only to a particular article within a file.

1. Placing the Index Files

Figure 10 illustrates the placement of index files in folders. There may be one index file for an entire book (Book 1, for example), or one per chapter (Book 2, for example). Having one index per chapter allows the developer to update a single chapter without having to replace the entire book. The one index per book scenario requires replacing the entire book if a single chapter (and thus the index file) changes. In either case, the index file must be placed in the folder that it represents (which is where it is placed when the index file is created by the HTML Indexing Tool).

2. Using the Index Files in Searches

At launch, the help viewer of the present invention creates a list of all files of type "TEXT" and creator "hbwr" contained in the operating system help folder. This list of files is cross-referenced with a list of all the books installed in the system. When a user performs a search in the help viewer the following events occur:

- 1) The "current book" is determined based on the currently displayed web page. If the current web page is the help center, then all books are searched.
 - 2) Only the index files associated with the "current book" are searched.
 - 3) A HTML file is generated with a list of search results and their links.
- The viewer displays this newly generated page.

C. File Organization

The following section illustrates how the contents of the operating system help folder, help viewer folder, books and chapters are organized according to the present invention.

5 1. Contents of the Help Folder

Inside the operating system folder of the present invention is a designated folder 1110 named "Help," which contains the following items, as illustrated in Figure 11:

- Help_Center.html 1120: a dynamically generated page of HTML which is
10 used to display the help center window;
- a help viewer folder 1130; and
- a folder for each book in the help system.

In Figure 11, for example, the Help folder 1110 contains an operating system help book 1140 and a word processing help book 1150.

15 2. Contents of the Help Viewer Folder

The contents of the help viewer folder 1120 is illustrated in Figure 12. It contains:

- the help viewer application 1210;
- hlpcentrtmpl.html 1220: a template used for generating the
20 Help_Center.html file;
- srchtips.html 1230: the Search Tips page; and
- a graphics folder 1240, which contains graphics for the help center, Search Results, and Search Tips pages.

3. Contents of a Book

The contents of an individual book is illustrated in Figure 13. As illustrated in Figure 13, the operating system help book (i.e., the Mac OS Help book) 1140 contains:

- 5 • an HTML file 1310 that contains the meta-tags needed to list the book in the help center;
- a database 1320 specifying the names and URLs for items in the Help menu; and
- a folder 1330 for each chapter in the book.

10 If the book uses a dynamically generated table of contents, it also includes:

- toc.html (1340): a dynamically-generated file used to display the left frame of the book's table of contents; and
- 15 • toctmpl.html (1350): a file used to generate the left frame of the book's table of contents.

If the book does not use a dynamically-generated table of contents, it includes an index file in the root level folder for the book.

4. Contents of a Chapter

20 A chapter contains the HTML files, Graphics files (e.g. gif files), scripts, and databases used in the chapter. If the chapter is to appear in a dynamically-generated table of contents, it preferably includes:

- a file at the root level of the chapter containing the meta-tags used by the table of contents generator; and
- a pre-compiled index for the chapter.

25 Figure 14 illustrates a sample file layout of the chapter directed to printing topics. As set forth above, the pre-compiled index is used in the searching process.

D. Building the Dynamic Table of Contents

There are two parts to the dynamic table of contents of the present invention: the list of books displayed when the user goes to the help center, and the list of topics (or chapters) displayed when the user selects one of the available books. The present invention allows the list of books displayed in the help center to be updated as users install new software, and as new books become available. The help system of the present invention is not limited to only displaying information that is available locally (i.e., on the computer's hard drive), but may also be structured to display information that is available remotely. For example, the help system may be designed to also retrieve and display available information from a local area network server, the Internet, or any other remote source. If a particular book from a remote source is not available when the help viewer is accessed, then it is not displayed to the user.

1. The Help Center Table of Contents

The help center home page is generated by the help viewer and displayed, as discussed previously, in response to the user choosing the help center from the Help menu, clicking the Home button in the help viewer window, or double-clicking the viewer application icon.

There are two instances when the help center home page, with its corresponding table of contents, is generated or regenerated by the help viewer. The first instance is when the help center home page does not already exist (i.e., before the help viewer generates the help center home page for the first time). The second instance is when a modification to the system necessitates such a regeneration. For example, when files have been added, deleted or modified, the help center home page must be regenerated in order to reflect these changes. The present invention makes the determination of whether to regenerate the help center home page by comparing the last modification date of the files in the operating

system help folder to the last date in which the help center home page was regenerated. If the help folder indicates that a file has been modified since the last time the help center home page has been generated, then the help viewer regenerates the home page in order to reflect those changes.

5 When the help center home page is to be generated or regenerated, the help viewer indexes through every file that is one level deep in the help folder.

Referring to Figure 11, for example, the help viewer indexes through all files in the Mac_OS_Help folder 1140 and all files in Microsoft_Word_Help folder 1150. When a HTML source file of type "TEXT" is found with the appropriate creator designation, it is scanned for special HTML meta-tags that identify this as a book that should be added to the help center. In an exemplary embodiment, the help viewer looks for the following tags:

```
<META NAME = "Title" CONTENT = "The OS and You">
```

This tag gives the book's title as displayed in the help center.

15 <META NAME="URL" CONTENT="http://utility.abcinc.com">

This tag is optional. It specifies a destination URL when the link is clicked in the help center. If no link is specified, a click on the book's title takes the user to this file.

<META NAME="Icon" CONTENT=

20 "Operating_System Help/Graphics/BookIcon.gif" >

This tag is also optional. It specifies an icon to be displayed next to the book's title in the Help Center. The path to the file should be relative to the `Help_Center.html` file (i.e., the help center HTML file) being generated. If no icon is specified, a default one is provided.

Once a table has been created with the information for all the books in the help center, the Help_Center.html file is created. This file is created in a manner similar to the way in which a mail-merge application might work. A template is used, and information for each book is entered to create the help center home page, just as addresses might be substituted in a form letter. The creation of a template for the help center home page, according to the instant invention, is discussed in detail below.

The Help_Center.html file is generated based on an HTML template file. This template file is copied over to the Help_Center.html file line for line until an HTML comment with the token TOCRowBegin is found. Between the comments associated with the tokens TOCRowBegin and TOCRowEnd, the tokens Title, URL and Icon are replaced with the information for each book found in the help folder. This process is repeated for every book in the table. Once all the data for each book has been entered, the rest of the template file (i.e., after the HTML comment with the TOCRowEnd token) is copied over verbatim.

2. The Table of Contents for Each Book

In addition to the generation of the table of contents for the help center, the help viewer also generates a file with the table of contents for each book installed in the help system. This file can then be used by the program developer when displaying the main page of that book.

The help viewer generates a file called "toc.html" in the root folder of each book (e.g., inside the Help:Mac_OS_Help folder in Figure 11). One of the following conditions can cause this file to be regenerated when the help viewer is launched: the file doesn't already exist or the last modification date of the book's folder (e.g., Help:Mac_OS_Help) is later than that of the book's "toc.html" file.

When the "toc.html" file is to be generated or regenerated, the help viewer indexes through every file that is one level deep in the book's folder. Referring to

Figure 13, for example, the help viewer indexes through all files in Help:Mac_OS_Help:prt folder and all files in Help:Mac_OS_Help:mon folder.

When an HTML source file of type "TEXT" is found having the appropriate creator designation, it is scanned for special HTML meta-tags that identify this as a chapter that should be added to the book's table of contents. Continuing with the foregoing exemplary embodiment, the following tags are looked for, and added to a table containing information about this particular book's chapters:

<META NAME = "Title" CONTENT = "Chapter 1: OS Introduction" >

Gives the chapter's title that is listed in the books table of contents.

<META NAME = "URL" CONTENT = "http://utility.abcinc.com" >

This tag is optional. It specifies a URL to go to when the link is clicked. If no link is specified, a click on the book's title takes the user to this file.

<META NAME = "Icon" CONTENT = "Graphics/BookIcon.gif" >

This tag is also optional. It specifies an icon associated with the given chapter.

The path to the file should be relative to the toc.html file being generated. If no icon is specified, a default icon is provided.

<META NAME = "Target" CONTENT = "_right" >

This tag is optional. It associates a target frame with the given chapter. This tag allows for the display of the table of contents in the left hand frame of the screen, and chapter specific information in the right hand frame. Possible values for the Target tag depend on how the developer organizes frames. If no value is specified, the value is preferably "_top" which forces the page to take over the available viewer window.

<META NAME = "Order" CONTENT = "80" >

This tag is optional. It is used to force an ordering of the book's chapters when the toc.html file is being generated. The chapters are listed based on the Order value; chapters with no Order tag are listed last. If there is more than one chapter with the same Order value, those chapters are sorted alphabetically.

Once a table has been created with the information for all the chapters in the book, the toc.html file is created. This file is generated based on an HTML template file. If there is a text file in the book's directory named toctmpl.html, it is used. This file is copied over to toc.html file line for line until a comment with the token TOCRowBegin is found. Between the comments associated with the tokens TOCRowBegin and TOCRowEnd, the tokens Title, URL, Icon and Target are replaced with the information for each book found in the help folder.

Once all the data for each chapter has been copied to the toc.html file, the rest of the template file, after the HTML comment with the TOCRowEnd token, is copied over verbatim.

3. Creating a Template for the Dynamic Table of Contents

In order to have the help viewer generate a dynamic table of contents, a template file is used. The template file preferably appears at the root level of the book's folder.

The template file contains standard HTML for the header and footer of the table of contents. In the middle of the template are TOCRowBegin and TOCRowEnd statements. Between these two statements is the format for a single table of contents entry.

The following example shows a template in which each row of the table of contents is a paragraph displaying an icon and a title.

```
<!--TOCRowBegin-->
  <A HREF="URL" TARGET="Target"> Title</A>
```

<!--TOCRowEnd-->

4. Adding a Book or Web Site to the Help Center

In order to have a book listed on the help center, an HTML document with appropriate creator designation is placed at the root level of the book's folder.

- 5 This document contains Title and Icon meta-tags as in the example below:

```
<META NAME="Title" CONTENT="OS Help" >
<META NAME="Icon" CONTENT="OS_Help/gfx/logo-gif" >
```

To have a Web site listed on the help center page, the developer also includes an URL meta-tag. For example:

10 <META NAME="Title" CONTENT="ABC Web Site" >
 <META NAME="Icon" CONTENT="ABC_Web_Site/logo.gif" >
 <META NAME="URL" CONTENT="http://www.abc.com" >

5. Adding a Document or Web Site to a Book's Table of Contents

- 15 To have a chapter listed in the left frame of a book's content page, an author must include a folder for the chapter at the root level of the book's folder. It is necessary that the folder include an HTML document with the appropriate creator designation and the Title, Order and Target meta-tags. It may also include the Icon meta-tag. For example:

20 <META NAME="Title" CONTENT="Speech" >
 <META NAME="Icon" CONTENT="Graphics/Bullet.gif" >
 <META NAME="Order" CONTENT="80" >
 <META NAME="Target" CONTENT="_right" >

- 25 To have a Web Site listed in the left frame of a book's contents page, the developer must also include an URL meta-tag. For example:

```
<META NAME="Title" CONTENT="System OS Web Site" >
<META NAME="Icon" CONTENT="Graphics/Globe.gif" >
<META NAME="URL" CONTENT="http://www.systemos.com" >
<META NAME="Order" CONTENT="50" >
```

`<META NAME="Target" CONTENT="_top">`

G. Language Reference Guide

The following is a reference guide to the meta-tags and comments used in the present invention.

5 Abstract

Syntax: `<!--Abstract="text string"-->`

Example: `<!--Abstract="text string"-->`

This comment is used to provide a brief introduction with the title of an article on the Search Results page. The comment may appear anywhere within a document or within a segment.

Icon

Syntax: `<META NAME="Icon" CONTENT="href">`

Example: `<META NAME="Icon" CONTENT="Graphics/Logo.gif">`

This meta-tag is used to specify the HREF attribute for a graphic displayed in a dynamic table of contents. The href is relative to the location of the contents file being generated.

Robots

Syntax: `<META NAME="Robots"`

`CONTENT="INDEX|SEGMENTS|NOINDEX">`

This meta-tag is used to specify whether a file is indexed. This meta-tag can specify that the whole document be indexed (i.e., the top of the document, as well as all segments in the document), segments only, or none of the document be indexed. The default is preferably "INDEX."

Order

Syntax: `<META NAME="Order" CONTENT="integer">`

This meta-tag is used to specify the order of items in a dynamic table of contents. Items with a lower number appear at the top of the list. If an Order
 5 value is not specified, the item appears at the bottom of the list. In case of ties, items are sorted alphabetically by name.

SegStart and SegEnd

Syntax: `<!--SegStart="segment name"-->`

segment content

10 `<!--SegEnd"-->`

Example: `<!--SegStart="Selecting a network printer"-->`

segment content

`<!--SegEnd"-->`

This comment is used to index a portion of a document.

15 Target

Syntax: `<META NAME="Target" CONTENT="target">`

Example: `<META NAME="Target" CONTENT="right_frame">`

This meta-tag specifies the target associated with a link in the help center or in a dynamic table of contents. The default is preferably "_top," meaning the link
 20 replaces the entire content of the window. This tag is generally used only when replacing the contents of a frame or opening a second viewer window.

Title

Syntax: `<META NAME="Title" CONTENT="title">`

Example: `<META NAME="Title" CONTENT="Printing">`

This meta-tag adds the title of a book to the help center or the title of a chapter to a dynamic table of contents. It appears in the heading of a file having the appropriate creator designation at the root level of a book's folder (to add to the help center) or at the root level of a chapter's folder (to add to a dynamic table of contents).

TOCRowBegin and TOCRowEnd

Syntax: <!--TOCRowBegin-->
 row template
 <!--TOCRowEnd-->

- 10 These comments appear in a template file between the header and footer of the contents file to be generated. The row template contains the HTML for displaying a single row in the table of contents. The row template can include any of the following variables: "Title," "Icon," "URL," "Target," and "Order."

URL

- 15 Syntax: <META NAME="URL" CONTENT="href">
 Example: <META NAME="URL"
 CONTENT="http://www.abcinc.com">

- 20 This meta-tag specifies the HREF attribute associated with a link in the help center or in a dynamic table of contents. The default is preferably the file in which the meta-tag appeared. This tag is generally used only when it is necessary to point a link elsewhere, such as to a Web site.

- 25 From the foregoing, it can be seen that the present invention provides a mechanism for dynamically generating a table of contents for an information presentation system, such as a help system. With this approach, authors are provided with the flexibility to add, remove, and otherwise modify the contents of individual components of the help system, without the need to re-create the table of

contents. Each time the system is accessed by a user, the table of contents reflects the currently existing components that can be viewed by the user.

Many variants and combinations of the techniques taught above may be devised by a person skilled in the art without departing from the spirit or scope of the invention as described by the following claims. Although the systems and methods of the present invention have been set forth in an informational help system environment, it will be recognized by those skilled in the art that the instant invention is applicable to any environment where information is provided in a hierarchical manner and where there is a desire for an up-to-date listing of that information.

WHAT IS CLAIMED IS:

1. A method for displaying information to a user of a computer system, said method comprising the steps of:
 - activating a computerized information system;
 - 5 dynamically generating a table of contents in response to said activation;
 - and
 - displaying said dynamically generated table of contents;
 - wherein said computer system displays an up-to-date listing of available information.
- 10 2. The method according to claim 1 wherein said step of dynamically generating comprises the steps of:
 - indexing each file and book of a predetermined folder for files of a first type; and
 - scanning said files of a first type for at least one HTML meta-tag of a
 - 15 second type in order to determine data to be added to said table of contents.
3. The method according to claim 2 wherein said files of a first type are text files having a predetermined creator designation.
4. The method according to claim 2 wherein said at least one HTML meta-tag is a meta-tag for providing a title.
- 20 5. The method according to claim 2 wherein said predetermined folder is a folder that is uniquely associated with a help system.

6. A method for providing a dynamically generated table of contents upon activation of a computerized information help system, said method comprising the steps of:

5 indexing each file and a first level of each book of a predetermined folder for files of a first type;
scanning said files of a first type for at least one HTML meta-tag of a second type in order to determine first data to be added to a first table of contents;
generating said first table of contents using said first data;
formatting said first table of contents using a template; and
10 displaying said formatted first table of contents.

7. The method according to claim 6 wherein said predetermined folder is a folder that is uniquely associated with a help system.

8. The method according to claim 6 wherein said files of a first type are text files having a predetermined creator designation.

15 9. The method according to claim 6 wherein said at least one HTML meta-tag is a meta-tag for providing a title.

10. The method according to claim 6 further comprising the steps of:
indexing each chapter within each book of said predetermined folder for files of a first type;
20 scanning said files of a first type of each book for at least one HTML meta-tag of a second type in order to determine second data to be added to a table of contents for each book; and
dynamically generating a table of contents for each book using said second data.

11. The method according to claim 10 further comprising the step of formatting said table of contents for each book using an HTML template.

12. The method according to claim 11 further comprising the step of providing said formatted second table of contents for each book in response to a request.

5 13. The method according to claim 6 wherein said formatted first table comprises at least one link to a location of a file on the computer system.

14. The method according to claim 6 wherein said formatted first table of contents comprises at least one link to a web page on the Internet.

10 15. The method according to claim 6 further comprising the step of:
determining, in response to the activation of said information help system, whether a table of contents needs to be generated.

16. The method according to claim 15 wherein said step of determining further comprises the steps of:

15 determining whether a table of contents for said help system already exists;
determining, if said table of contents already exists, whether said table of contents is up-to-date; and

determining that a table of contents needs to be generated when said table of contents fails to either exist or be up-to-date.

20 17. The method according to claim 16 wherein said step of determining whether the table of contents is up-to-date comprises the steps of:

comparing a modification date of files to be used in the generation of said first table of contents and a date in which the table of contents was last generated; and

5 determining that said table of contents is not up-to-date when said modification date is more recent than said generation date.

18. A method for displaying a dynamically generated table of contents of a computerized information help system, said method comprising the steps of:

activating said help system;
 10 determining whether a table of contents for said help system already exists;
 determining, if said table of contents already exists, whether said table of contents is up-to-date;
 dynamically generating a table of contents when said table of contents fails to either exist or be up-to-date; and
 displaying said dynamically generated table of contents.

15 19. The method according to claim 18 wherein said step of determining whether the table of contents is up-to-date comprises the steps of:

comparing a modification date of files to be used in the generation of said table of contents and a date in which the table of contents was last generated; and
 20 determining that said table of contents is not up-to-date when said modification date is more recent than said generation date.

20. The method according to claim 18 wherein said step of dynamically generating comprises the steps of:

indexing each file and book of a predetermined folder for files of a first type; and

scanning said files of a first type for at least one HTML meta-tag of a second type in order to determine data to be added to said table of contents.

21. The method according to claim 20 wherein said files of a first type are text files having a predetermined creator designation.

5 22. The method according to claim 20 wherein said at least one HTML meta-tag is a meta-tag for providing a title.

23. The method according to claim 20 wherein said predetermined folder is a folder that is uniquely associated with a help system.

24. An apparatus for displaying information to a user of a computer system,
10 said apparatus comprising:
a viewer for dynamically generating a list of books currently available to the user; and
a display device for displaying said list of currently available books;
wherein said viewer dynamically generates said list of books in response to
15 a request.

25. The apparatus according to claim 24 wherein said viewer generates said list of books by indexing each file and book of a predetermined folder for files of a first type and scanning said files of a first type for at least one HTML meta-tag of a second type in order to determine data to be added to said list of books.

20 26. The apparatus according to claim 25 wherein said files of a first type are text files having a predetermined creator designation.

27. The apparatus according to claim 25 wherein said at least one HTML meta-tag is a meta-tag for providing a title.

28. The apparatus according to claim 25 wherein said predetermined folder is a folder that is uniquely associated with a help system.

5 29. A system for displaying a dynamically generated table of contents upon activation of a computerized information help system, said system comprising:
means for indexing each file and a first level of each book of a
predetermined folder for files of a first type;
means for scanning said files of a first type for at least one HTML meta-tag
10 of a second type in order to determine first data to be added to a first table of contents;
means for generating said first table of contents using said first data;
means for formatting said first table of contents using a template; and
means for displaying said formatted first table of contents.

15 30. The system according to claim 29 wherein said predetermined folder is a folder that is uniquely associated with a help system.

31. The system according to claim 29 wherein said files of a first type are text files having a predetermined creator designation.

20 32. The system according to claim 29 wherein said at least one HTML meta-tag is a meta-tag for providing a title.

33. The system according to claim 29 further comprising:

means for indexing each chapter within each book of said predetermined folder for files of a first type;

means for scanning said files of a first type of each book for at least one HTML meta-tag of a second type in order to determine second data to be added to
5 a table of contents for each book; and

means for dynamically generating a table of contents for each book using said second data.

34. The system according to claim 33 further comprising means for formatting said table of contents for each book using an HTML template.

10 35. The system according to claim 34 further comprising means for displaying said formatted second table of contents for each book in response to a request.

36. The system according to claim 29 wherein said formatted first table comprises at least one link to a location of a file on the computer system.

15 37. The system according to claim 29 wherein said formatted first table of contents comprises at least one link to a web page on the Internet.

38. The system according to claim 29 further comprising:
means for determining, in response to the activation of said information help system, whether a table of contents needs to be generated.

20 39. The system according to claim 38 wherein said means for determining further comprises:

means for determining whether a table of contents for said help system already exists;

means for determining, if said table of contents already exists, whether said table of contents is up-to-date; and

means for determining that a table of contents needs to be generated when said table of contents fails to either exist or be up-to-date.

- 5 40. The system according to claim 39 wherein said means for determining whether the table of contents is up-to-date comprises:

means for comparing a modification date of files to be used in the generation of said first table of contents and a date in which the table of contents was last generated; and

- 10 means for determining that said table of contents is not up-to-date when said modification date is more recent than said generation date.

41. A computer-readable medium containing a program which performs the steps of:

activating a computerized information system;

- 15 dynamically generating a table of contents in response to said activation; and

displaying said dynamically generated table of contents;

wherein said dynamically generated table of contents is an up-to-date listing of available information.

- 20 42. The computer-readable medium according to claim 41 wherein said step of dynamically generating comprises the steps of:

indexing each file and book of a predetermined folder for files of a first type; and

- 25 scanning said files of a first type for at least one HTML meta-tag of a second type in order to determine data to be added to said table of contents.

43. The computer-readable medium according to claim 42 wherein said files of a first type are text files having a predetermined creator designation.

44. The computer-readable medium according to claim 42 wherein said at least one HTML meta-tag is a meta-tag for providing a title.

5 45. The computer-readable medium according to claim 42 wherein said predetermined folder is a folder that is uniquely associated with a help system.

46. A computer-readable medium containing a program which performs the steps of:

10 indexing each file and a first level of each book of a predetermined folder for files of a first type;
scanning said files of a first type for at least one HTML meta-tag of a second type in order to determine first data to be added to a first table of contents;
generating said first table of contents using said first data;
formatting said first table of contents using a template; and
15 displaying said formatted first table of contents.

47. The computer-readable medium according to claim 46 wherein said predetermined folder is a folder that is uniquely associated with a help system.

48. The computer-readable medium according to claim 46 wherein said files of a first type are text files having a predetermined creator designation.

20 49. The computer-readable medium according to claim 46 wherein said at least one HTML meta-tag is a meta-tag for providing a title.

50. The computer-readable medium according to claim 46 further comprising the steps of:

indexing each chapter within each book of said predetermined folder for files of a first type;

5 scanning said files of a first type of each book for at least one HTML meta-tag of a second type in order to determine second data to be added to a table of contents for each book; and

dynamically generating a table of contents for each book using said second data.

10 51. The computer-readable medium according to claim 50 further comprising the step of formatting said table of contents for each book using an HTML template.

15 52. The computer-readable medium according to claim 51 further comprising the step of providing said formatted second table of contents for each book in response to a request.

53. The computer-readable medium according to claim 46 wherein said formatted first table comprises at least one link to a location of a file on a computer system.

20 54. The computer-readable medium according to claim 46 wherein said formatted first table of contents comprises at least one link to a web page on the Internet.

55. The method according to claim 15 wherein said step of determining further comprises the step of:

determining whether said template exists; and
determining that a table of contents needs to be generated only when said
template exists.

- 5 56. The system according to claim 38 wherein said means for determining
further comprises:
means for determining whether said template exists; and
means for determining that a table of contents needs to be generated only
when said template exists.

ABSTRACT

The present invention discloses a method for dynamically generating an HTML-based information help system. The information help system provides a user with a table of contents of the information that is currently available on the system. The table of contents is generated by scanning specific files for meta-tag information. The gathered information is merged with pre-defined HTML template files that control the formatting and presentation of the information. The resulting table of contents which is provided to the user accurately reflects the current content of the information system. By dynamically generating the table of contents for the information help system, the present invention allows authors to add, remove, and change individual components of the system while ensuring that users are presented with an accurate and complete list of the information available for use.

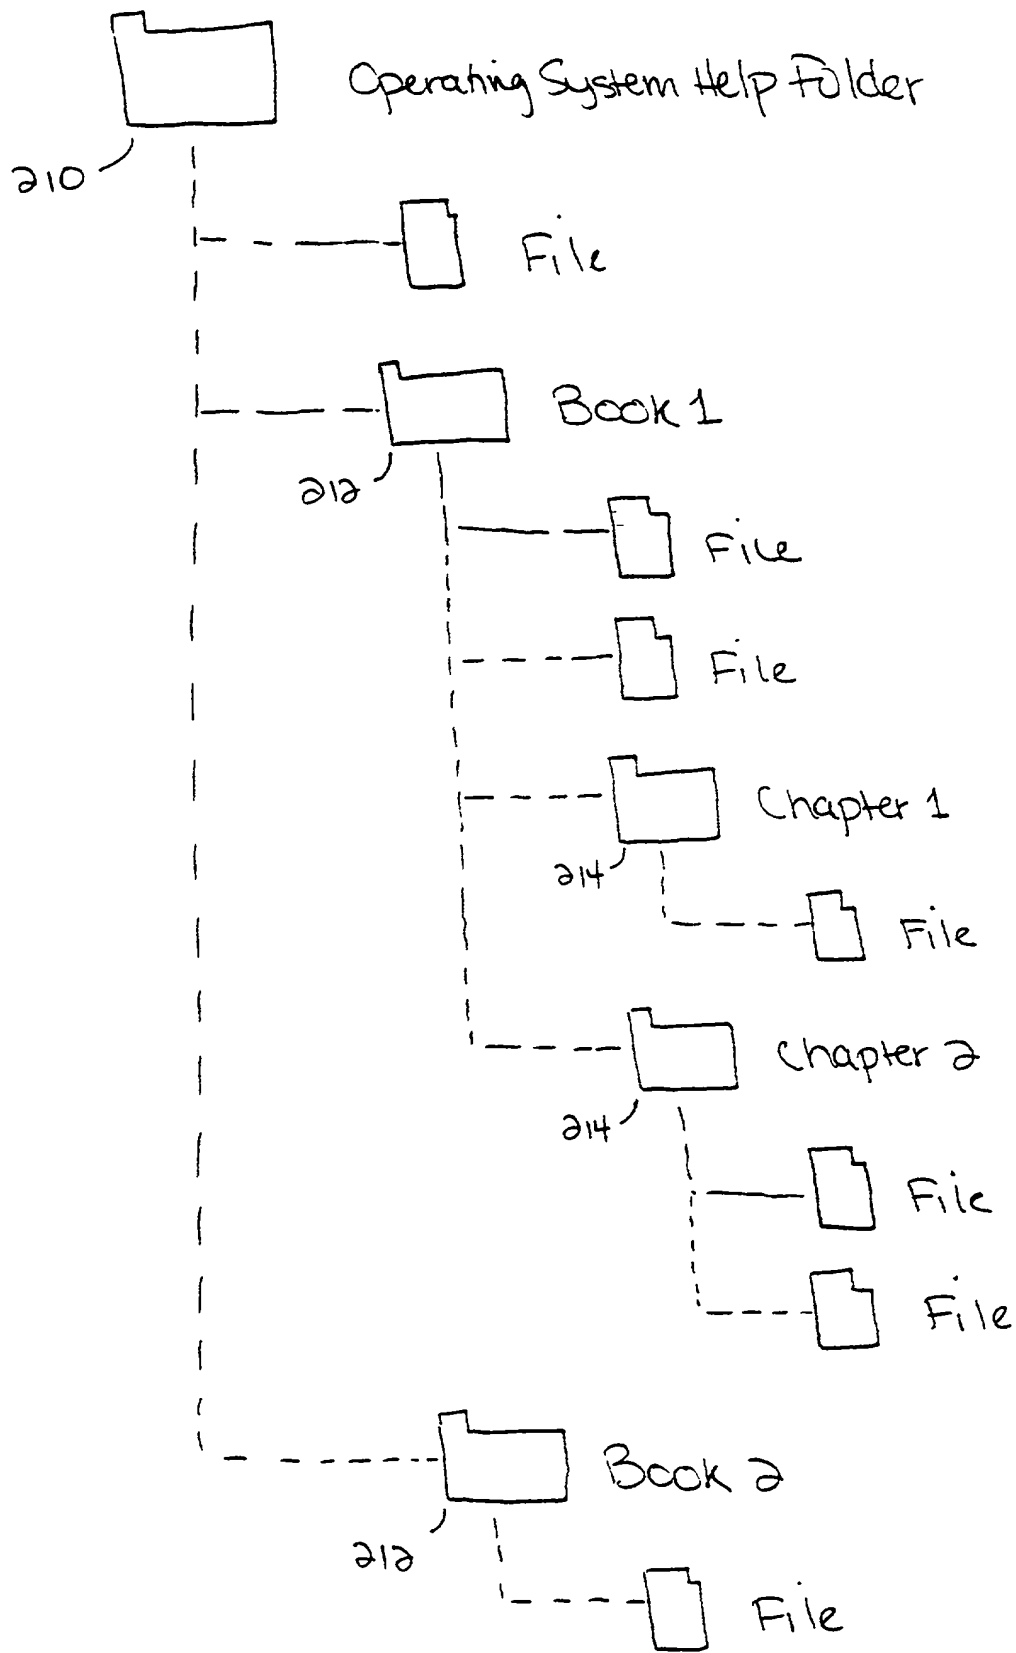


Figure 2

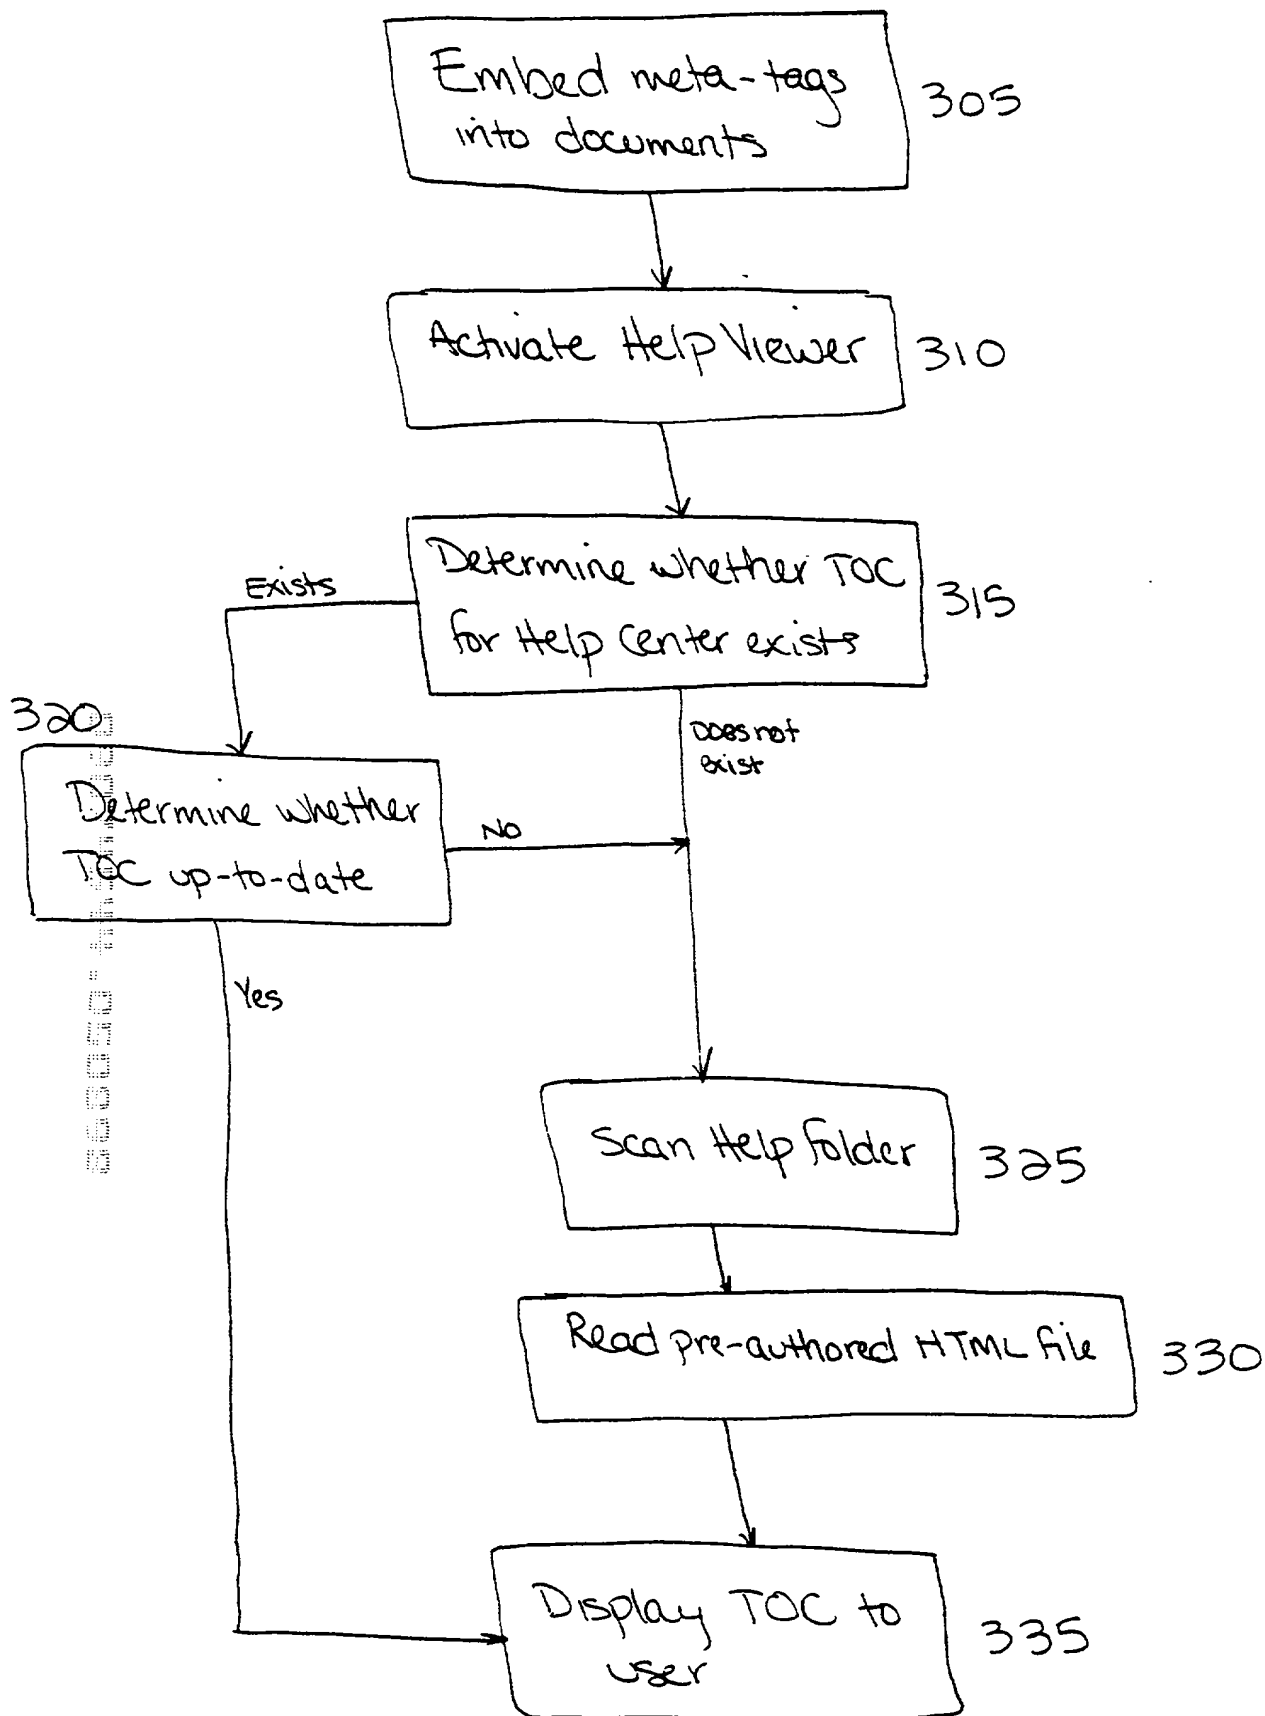


Figure 3

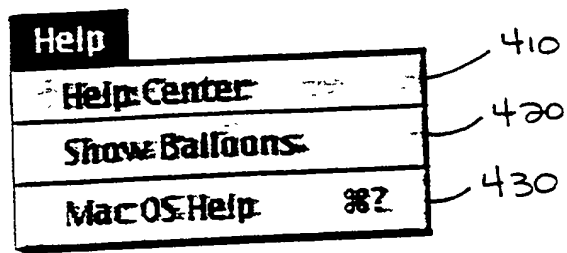


Figure 4




Figure 5.

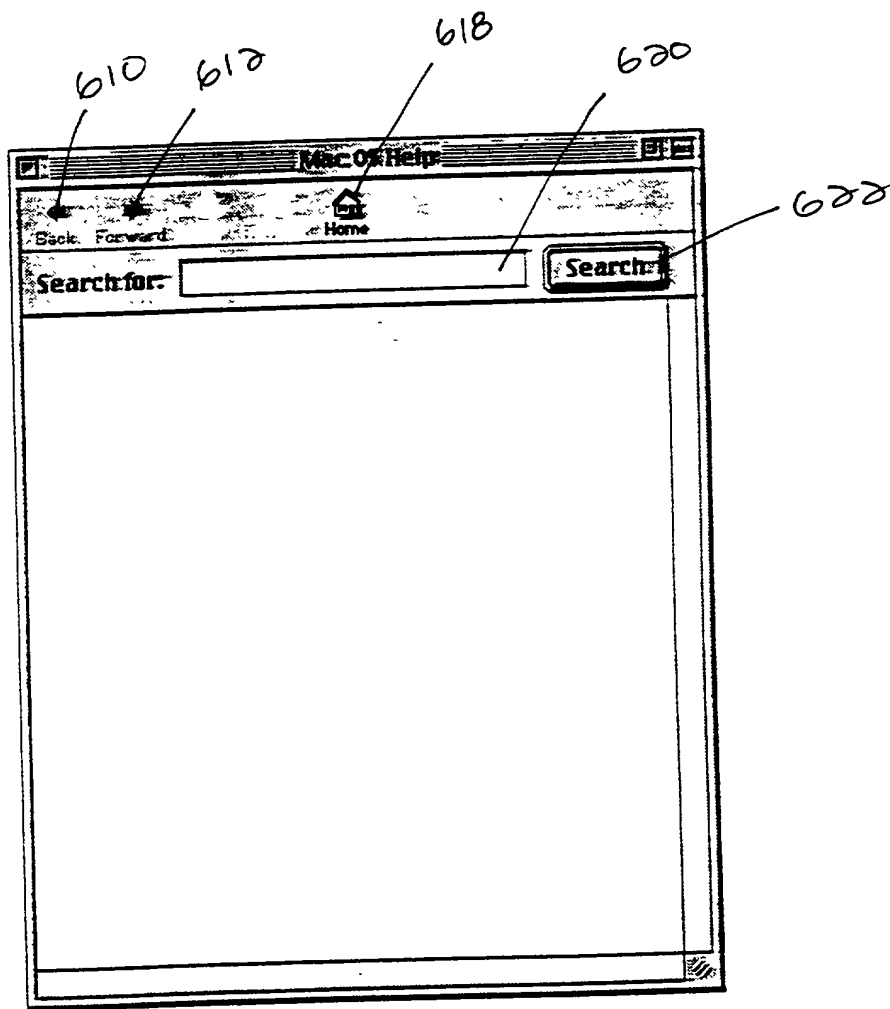


Figure 6

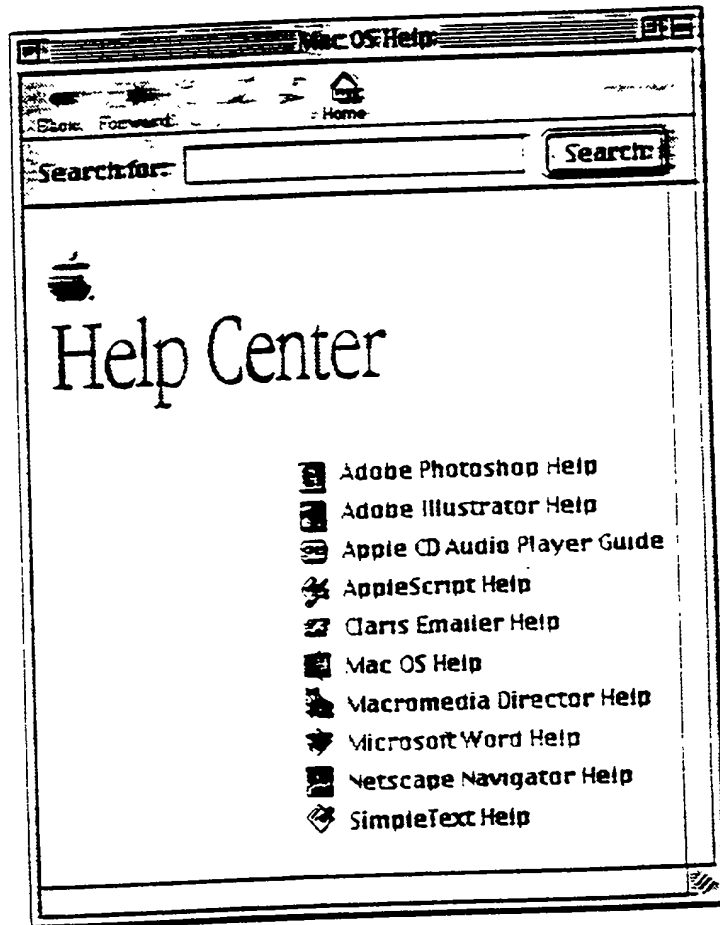


Figure 7

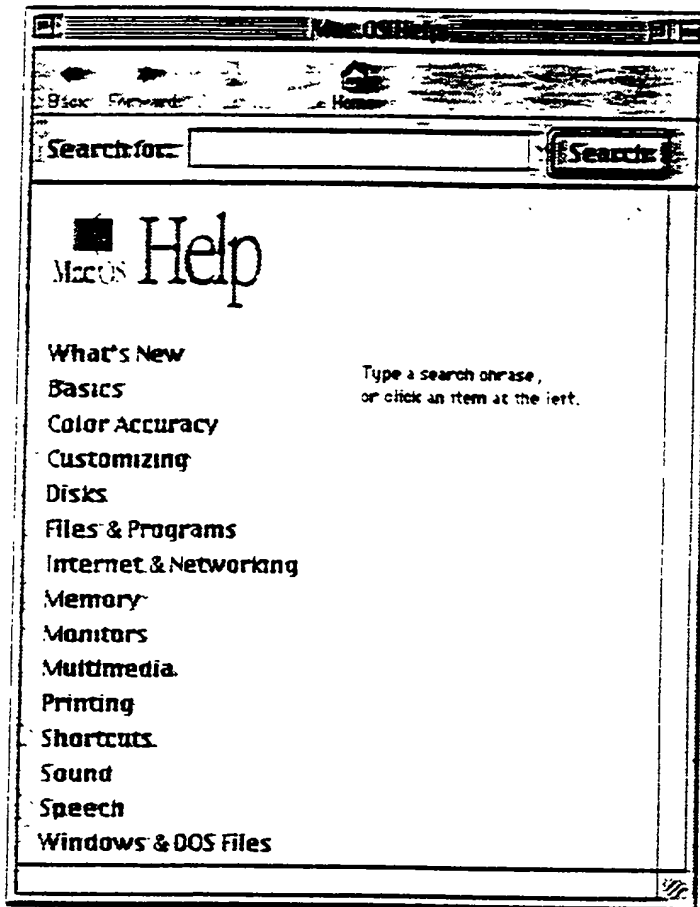


Figure 8

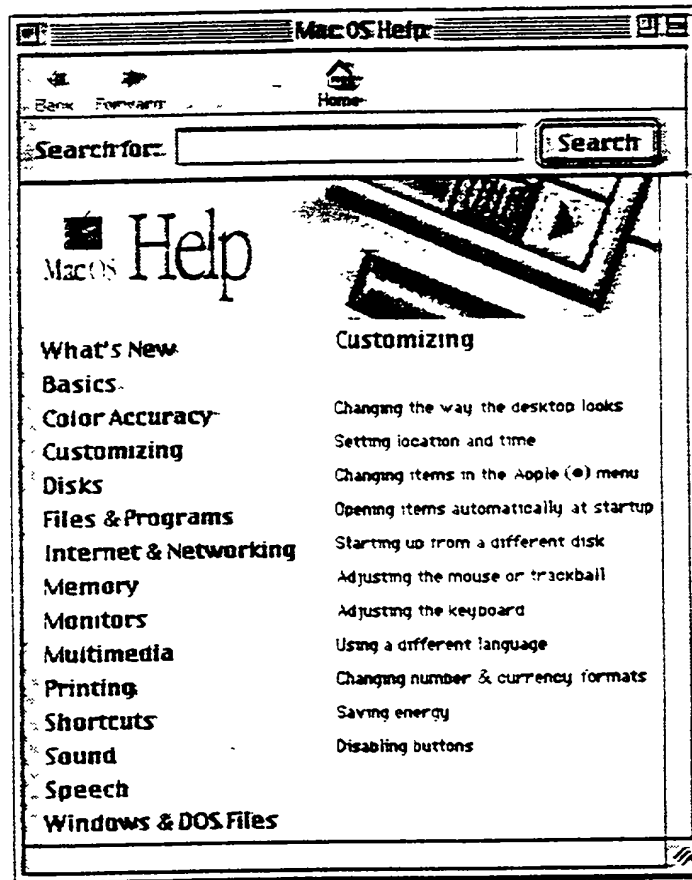


Figure 9

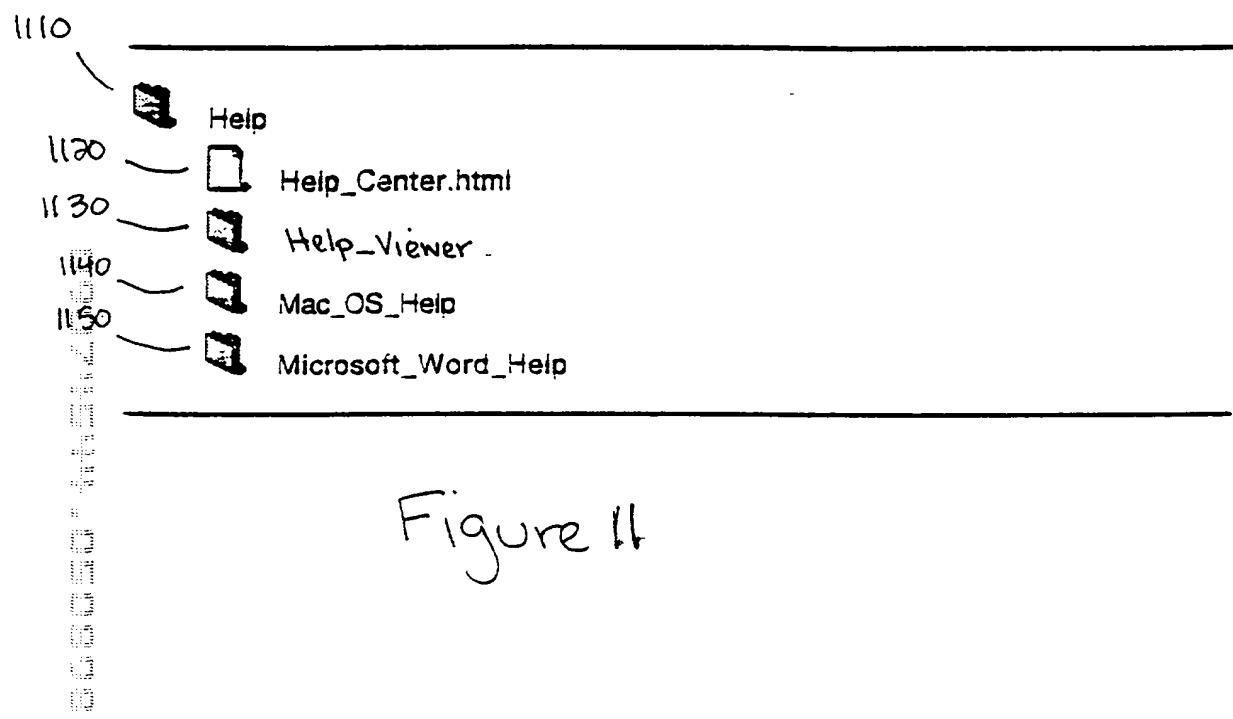


Figure 11

1120



Help Viewer

1210



help viewer

1220



hlpcentrtmpl.html

1230



srchtips.html

1240



gfx



hlpcentr.gif



srchrsits.gif



srchtips.gif

Figure 12

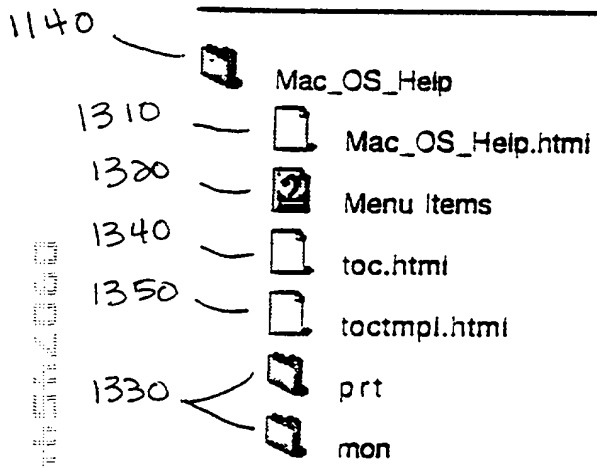


Figure 13



prt



prttoc.html



prttopics.html



prtindex



prtselect



prtttbl

Figure 14

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR UTILITY PATENT APPLICATION**

Attorney's Docket No.

P2248-472

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (if only one name is listed below) OR AN ORIGINAL, FIRST AND JOINT INVENTOR (if more than one name is listed below) OF THE SUBJECT MATTER WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

METHOD FOR DYNAMICALLY GENERATING A "TABLE OF CONTENTS" VIEW OF A HTML-BASED
INFORMATION SYSTEM

the specification of which

(check one)



is attached hereto;



was filed on _____ as

Application No. _____

and was amended on _____;
(if applicable)

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE;

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE OFFICE ALL INFORMATION KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, Sec. 1.56 (as amended effective March 16, 1992);

I do not know and do not believe the said invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to said application; that said invention was not in public use or on sale in the United States of America more than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States of America on any application filed by me or my legal representatives or assigns more than twelve months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code Sec. 119 and/or Sec. 365 of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application(s) on which priority is claimed:

COMBINED DECLARATION AND POWER OF ATTORNEY			Attorney's Docket No. P2248-472
COUNTRY/INTERNATIONAL	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
			YES_ NO_
			YES_ NO_

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Mathis	17,337	James A. LaBarre	28,632	William H. Benz	25,952
Platon N. Mandros	22,124	James W. Peterson	26,057	Peter K. Skiff	31,917
Alan E. Kopecki	25,813	William C. Rowland	30,888	Richard J. McGrath	29,195
Samuel C. Miller, III	27,360	T. Gene Dillahunt	25,423	Matthew L. Schneider	32,814
Kenneth B. Leffler	36,075	Patrick C. Keane	32,858	Gerald F. Swiss	30,113
Allen R. Baum	36,086	Bruce J. Boggs, Jr.	32,344	Michael J. Ure	33,089
Steven M. duBois	35,023	Susan E. Heminger	36,449	Charles F. Wieland III	33,096
Mark Aaker	32,667	Richard Liu	34,377	Mark R. Kresloff	P42,766
Helene Plotka Workman	35,981	Nancy R. Simon	36,930	Edward W. Scott	36,000
		Michael A. Wrenn	P42,237		

and: _____

Address all correspondence to: James W. Peterson
BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404

Address all telephone calls to: James A. LaBarre at (703) 836-6620.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR	SIGNATURE	DATE
Gordon R. MEYER		
RESIDENCE		CITIZENSHIP
San Jose, California		United States
POST OFFICE ADDRESS		
P. O. Box 700445, San Jose, CA 95170		
FULL NAME OF SECOND JOINT INVENTOR, IF ANY	SIGNATURE	DATE
Albert R. HOWARD, Jr.		
RESIDENCE		CITIZENSHIP
Fremont, California		United States
POST OFFICE ADDRESS		
3411 Brookmill Court, Fremont, CA 94536		
FULL NAME OF THIRD JOINT INVENTOR, IF ANY	SIGNATURE	DATE
Kevin KNABE		
RESIDENCE		CITIZENSHIP
San Jose, California		United States
POST OFFICE ADDRESS		
1041 Bentoak Lane, San Jose, CA 95129		

COMBINED DECLARATION AND POWER OF ATTORNEY		Attorney's Docket No. P2248-472	
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY Richard B. HOIBERG	SIGNATURE		DATE
RESIDENCE Gilroy, California		CITIZENSHIP United States	
POST OFFICE ADDRESS 1430 Quail Walk, Gilroy, CA 95020-7710			
FULL NAME OF FIFTH JOINT INVENTOR, IF ANY	SIGNATURE		DATE